


FEATURES

- The XC-GL series granulators with high-speed rotation are suitable to be installed beside the machine, combination with a collector and dryer to form a rapid recycling system. It eliminates the complex intermediate links, and avoids manpower and material waste. Hence ensures maximum recycling efficiency.
- Suitable for spot recycle of plastic container, film, small plastic bottles from injection molding machines and extrusion parts, tailored to an extremely wide range of application.
- The high-speed granulator has characteristics of low noise, occupying small space, energy efficiency, dust free and able to operate for long hours continuously, with high efficient environment protection.

INSTALLATION DIAGRAM

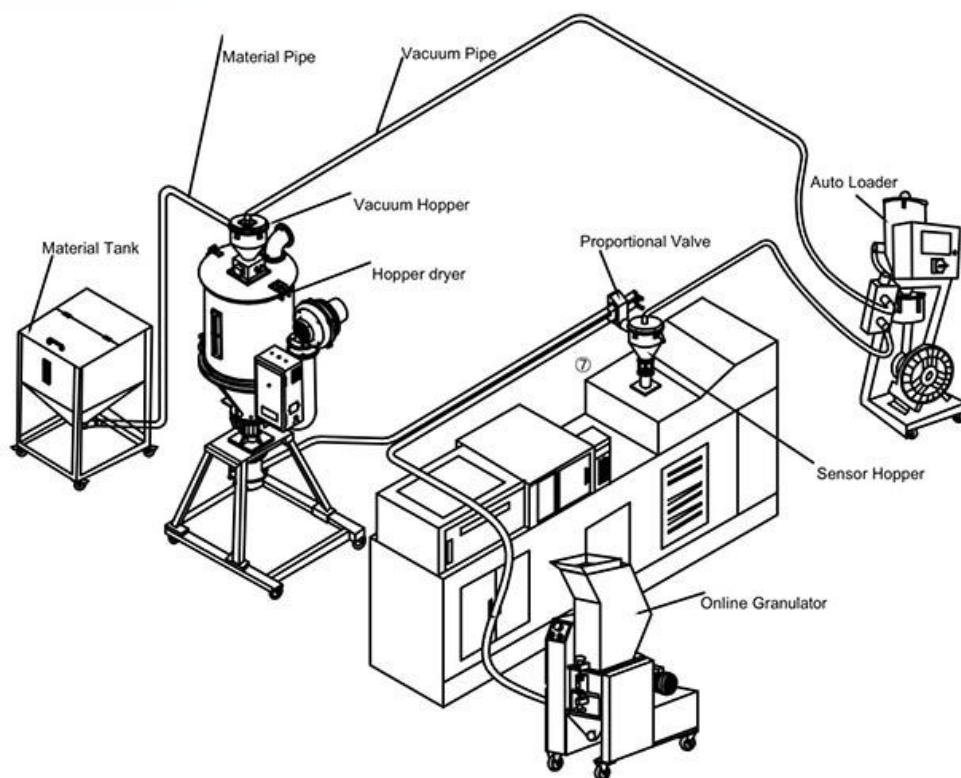

Grinding chamber

SPECIFICATIONS

型号 Model	粉碎口径 (mm) Grinding Chamber	粉碎能力 (KG/H) Grinding Capacity	转速 (R/min) Rotating Speed	固定刀 Stationary Cutter		旋转刀 Rotary Cutter		电机功率 (Motor Power)		风机功率 (KW) Fan Power	外形尺寸 (mm) LxWxH	净重约(KG) Approx. Net Weight
						KW	HP					
XC-GL180/RC	180x180	40-70	380	2	9	1.5	2	0.37	690x420x1130	135		
XC-GL250/RC	250x200	80-100	380	2	12	2.2	3	1.1	930x640x1360	247		
XC-GL310/RC	310x200	80-130	380	2	15	4	5	1.1	1000x660x1360	390		

Note: "RC" it means equipped with recycling system, with suitable blower.
We reserve the right to change specifications without prior notice.