


FEATURE

- One main machine controlling several hoppers to save cost and space; Vacuum hoppers and sensor hoppers are alternative.
- Perfect for drying and conveying in one system with simplified systematic structure and high efficiency.
- Fully automatic microcomputer controlled.
- Integrated control, easy and safe to operate.
- Easy maintenance.

INSTALLATION DIAGRAM

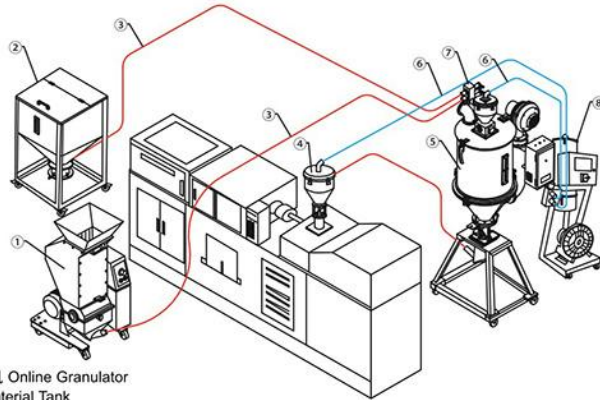

- 1. 机边破碎机 Online Granulator
- 2. 储料箱 Material Tank
- 3. 料管 Material Pipe
- 4. 电眼料斗 Sensor Hopper
- 5. 干燥机 Hopper Hopper
- 6. 真空管 Vacuum Pipe
- 7. 两料比例阀 Proportional Valve
- 8. 吸料机 Auto Loader

900G2吸料机应用（双段送料）
900G2 Application (Two-stage Conveying)

SPECIFICATIONS

型号 Model	XC-XY900G2	XC-XY900G3	XC-XY900G4
马达 Motor (HP/KW)	1.5/1.1	2/1.5	3/2.2
输送能力 Conveying Capacity (KG/h)	440	500	590
吸料扬程 Loading Distance (m)	4	4	5
静风压 Static Wind Pressure (mm/H ₂ O)	2400	2400	2400
储料桶容量 Storage tank Volume (L)	10/7.5x2	10/7.5x3	10/7.5x4
送料管内径 Conveying Tube Inner Diameter (mm)	Φ38	Φ38	Φ38
配料送管 Specification Of The Attached Hoses (mm)	Φ38mmx4m 4Pcs	Φ38mmx4m 6Pcs	Φ38mmx4m 8Pcs
外型尺寸 Dimension (cm)	61x37x67	54x56x123	54x62x123
净重约 Approx. Net Weight (KG)	55	58	66

LOADER ACCESSORIES



Suction Tube

Standard item for hopper loaders, made by stainless steel, easy to use.



Filter

To avoid motor damage by powder in material loading and keep long term running.

Conveying capacity and loading distance are tested by ABS material; actual data may differ by plastic proportions, shapes, loading lengths and heights, pipe conditions and parameter settings.

For processing hot materials, Heat-Resistant(160°C) pipes are necessary.

We reserve the right to change specifications without prior notice.