


FEATURE:

- Use P.I.D temperature control system,has regenerating temperature settings and real temperature display function;
- Adopting two condensers to ensure a low return air temperature and low dew-point;
- Dehumidifying heater and temperature control panel as options, equipped with dry hopper can dry and dehumidify the raw material together;
- Setting return air filter inside to avoid the dust from materials damage the honeycomb.

INSTALLATION DIAGRAM

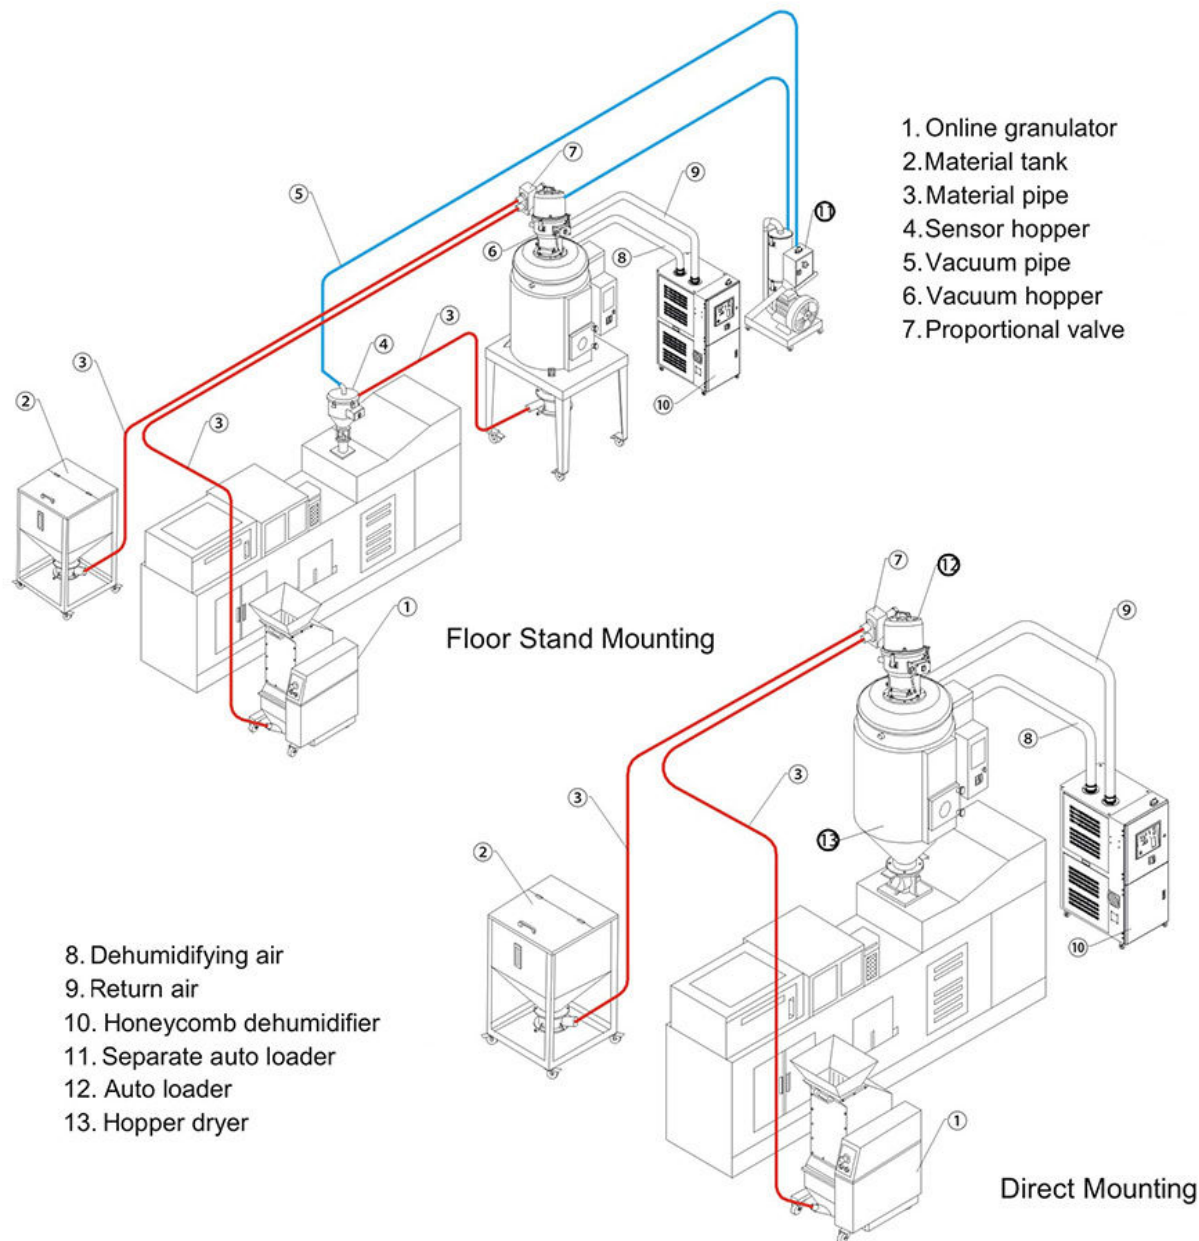

SPECIFICATION

型号 Model	XCD-	30H	50H	80H	120H	150H	200H	300H	400H	500H	700H	1000H	1500H	2000H	3000H
干燥风量 (m³/hr) Process Air Flow		30	50	80	120	150	200	300	400	500	700	1000	1500	2000	3000
干燥风车功率 (kw) Process Blower		0.25	0.4	0.75	0.75	1.5	1.5	2.4	3.75	5.5	5.5	9	9 × 2	13 × 2	13 × 3
再生风车功率 (kw) Regen. blower		0.25	0.25	0.25	0.25	0.4	0.4	0.75	0.75	1.5	1.5	2.4	3.4	5.5	7.5
再生电热功率 (kw) Regen. Heater		3	3	3.5	3.5	4	5.4	7.2	7.2	10	10	15	20	20	30
出入口之管径 (inch) Pipe Dia.		2"	2"	2"	2"	2.5"	2.5"	3"	3"	4"	4"	5"	6"	8"	8"
电压规格 Voltage		3Φ, 400V, 50Hz													
外型 Dimensions															
H(mm)		1670	1670	1670	1860	1860	2160	2160	2480	2480	2640	2640	2640	2640	2640
W(mm)		500	500	500	650	650	650	650	750	750	1350	1350	1350	1410	1600
D(mm)		780	780	780	1000	1000	1020	1020	1255	1255	1380	1380	1910	1910	2160
重量 (KG) Weight		80	80	120	140	215	225	240	280	290	300	400	510	630	760

Note: *Process heater is optional to be used with a drying hopper.