


FEATURE:

- Temperature and timer control in one unit, convenient for parameters setting.
- Well-designed structure, easy to operate.
- Stainless steel construction, easy to clean.
- Double layer protection to maintain temperature.
- Mixing in airtight chamber, magnetic separation process (optional).
- Automatic alarm for overload protection.

WORKING PRINCIPLE

The dry color mixer series operated in high-speed rotation of mixing, to cause plastic particles churn and collide, thus raise temperature by friction. Color materials mixed while moisture evaporated from exhaust pipe.

STRUCTURE DIAGRAM

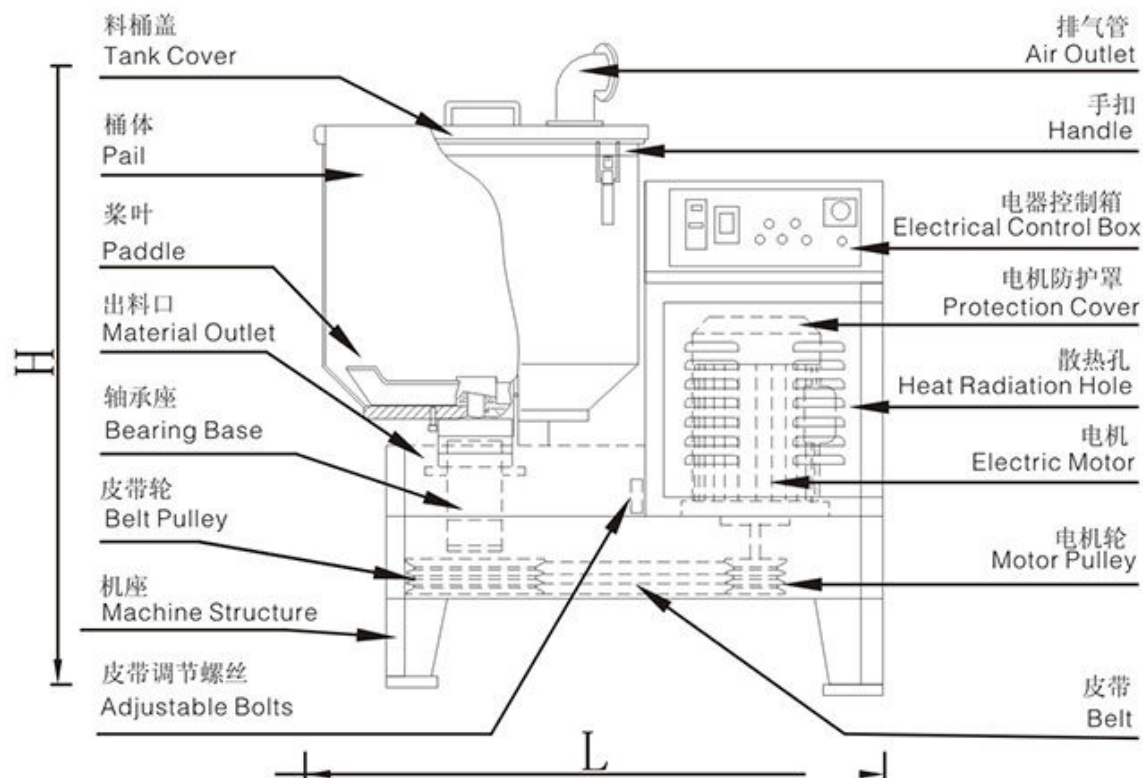

SPECIFICATIONS

型号 Model	功率/Power		容量(KG) Capacity	电压(V) Voltage	外形尺寸 (MM) Dimensions	转速 (R/MIN) Rotating Speed	净重约 (KG) Approx. Net Weight
	KW	HP					
XC-GH50KG	7.5	10	50	380 3Φ	1170x830x1350	480	230
XC-GH100KG	15	20	100	380 3Φ	1340x980x1520	480	270
XC-GH200KG	30	40	200	380 3Φ	1700x1300x1700	480	700

We reserve the right to change specifications without prior notice.